RoHS Compliant

VERSION	DESCRIPTION	DATE
1.0	New Release	2014/8/29

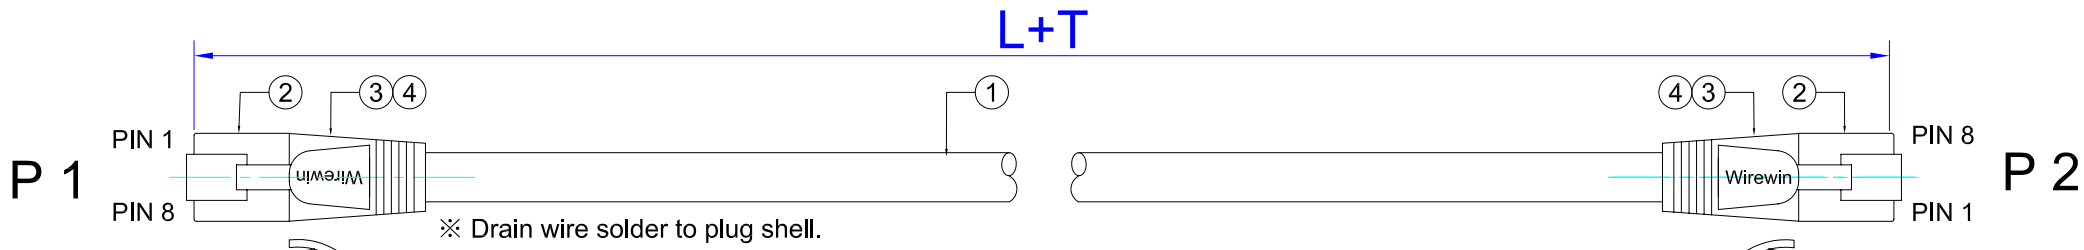

※ Drain wire solder to plug shell.

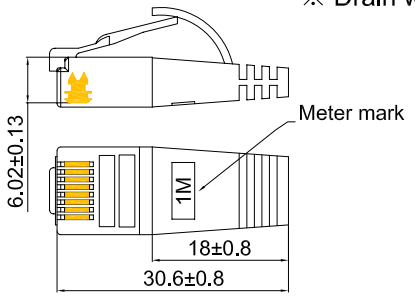

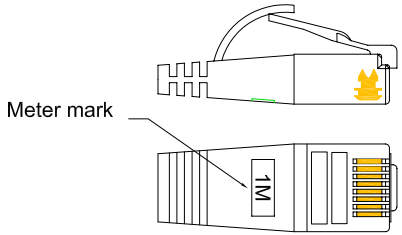

	Part nr.	L	T	Meter mark
	PKW-STP-SLIM-KAT6 0.1	0.1m	-10/+30mm	0.1M
	PKW-STP-SLIM-KAT6 0.15	0.15m	-10/+30mm	0.15M
	PKW-STP-SLIM-KAT6 0.25	0.25m	-10/+30mm	0.25M
	PKW-STP-SLIM-KAT6 0.5	0.5m	-10/+30mm	0.5M
	PKW-STP-SLIM-KAT6 0.75	0.75m	-10/+40mm	0.75M
	PKW-STP-SLIM-KAT6 1.0	1.0m	-15/+50mm	1M
	PKW-STP-SLIM-KAT6 1.5	1.5m	-15/+50mm	1.5M
	PKW-STP-SLIM-KAT6 2.0	2.0m	-20/+50mm	2M
	PKW-STP-SLIM-KAT6 3.0	3.0m	-30/+50mm	3M
	PKW-STP-SLIM-KAT6 5.0	5.0m	±50mm	5M
	PKW-STP-SLIM-KAT6 7.5	7.5m	±75mm	7.5M
	PKW-STP-SLIM-KAT6 10.0	10.0m	±100mm	10M
	PKW-STP-SLIM-KAT6 15.0	15.0m	±100mm	15M
	PKW-STP-SLIM-KAT6 20.0	20.0m	±150mm	20M
	PKW-STP-SLIM-KAT6 25.0	25.0m	±150mm	25M

Cable Structure(8:1):

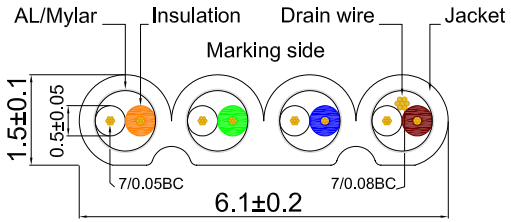

Cable Jacket marking:

Wirewin Category 6 STP Slimpatchcord-verified for Gigabit Ethernet

PIN OUT

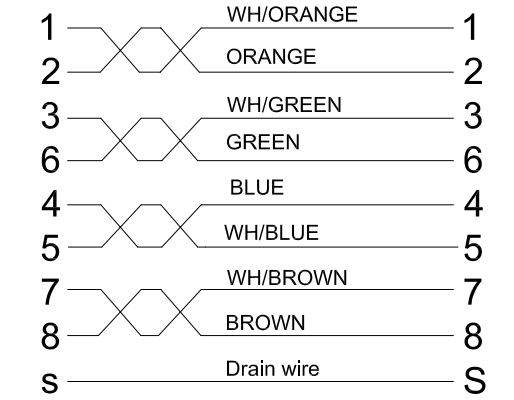

Test:

(1)100% Open Short and miswire test.
(2)DC300V,Contact resistance (3+2L)Ω MAX.
(2)Insulation resistance 1MΩ MIN.
(3)Pass TIA Cat.6 channel test(L≤15m).

No.	Description
5	
4	PVC Grey(ULC-348/60P), Model:SR073(External mold)
3	PVC Grey(ULC-348/60P), Model:SR041(Internal model)
2	(P1&P2) RJ45,8P8C,Short plug,Long latch,Pin gold plated 50u",Nickel plated shell
1	CAT.6 STP 4P*36AWG-BC STRANDED,PVC,O.D.=1.5*6.1mm,Color:Grey(ULC-348)

Wirewin® European Cabling Solutions

		TITLE	Cat6 STP 36AWG Patch Cable, Grey xxm		
UNIT	mm			DRAWN BY	Pregun
unless otherwise stated Tolerances mm XXX.XX ±0.3 XX.XX ±0.2 X.XX ±0.1 angular ±2°		P/N	PKW-STP-SLIM-KAT6 xx	CHECK BY	
		SIZE A4 / SCALE Free	PAGE 1/1	APPROVAL BY	Thir