


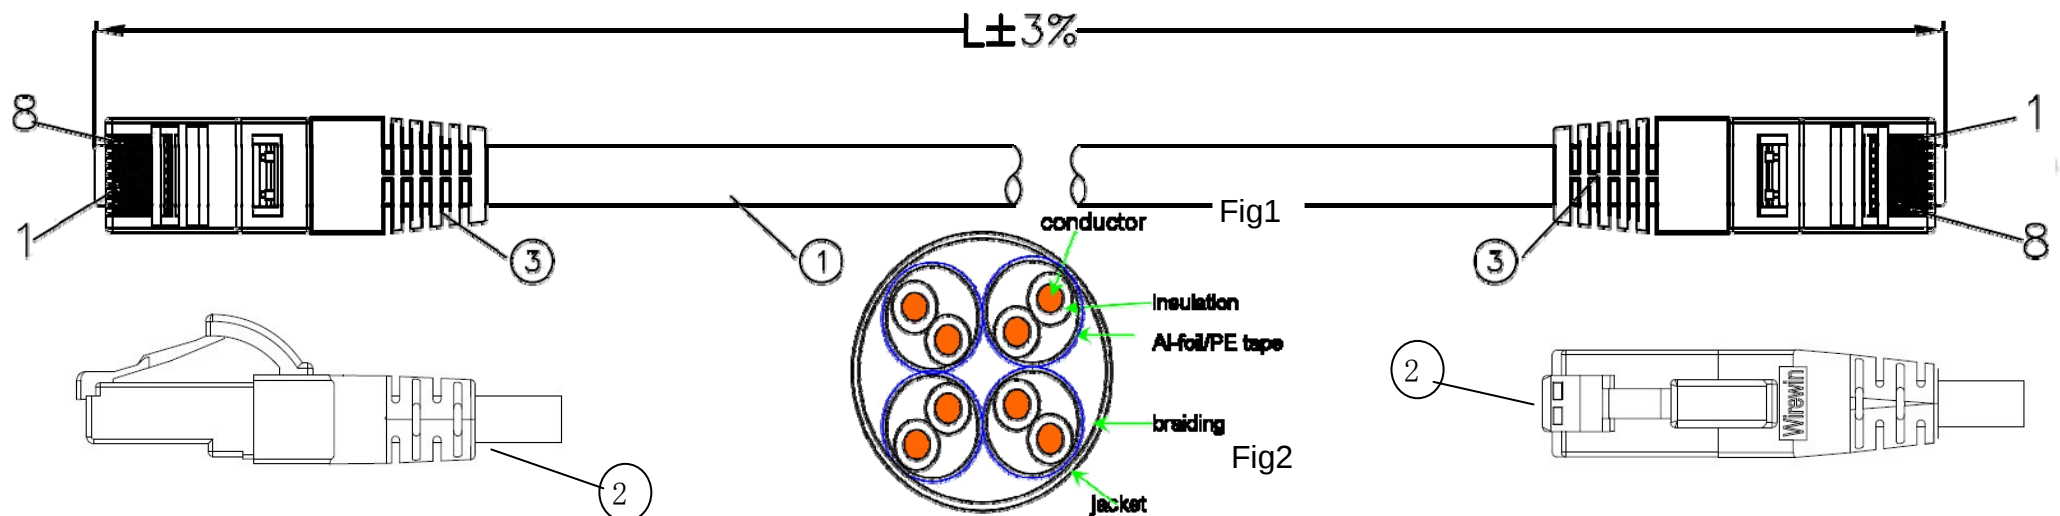

568B	Pin out	568B
white-orange	1	1 white-orange
orange	2	2 orange
white-green	3	3 white-green
green	6	6 green
blue	4	4 blue
white-blue	5	5 white-blue
white brown	7	7 white brown
brown	8	8 brown
shell		shell

Fig3

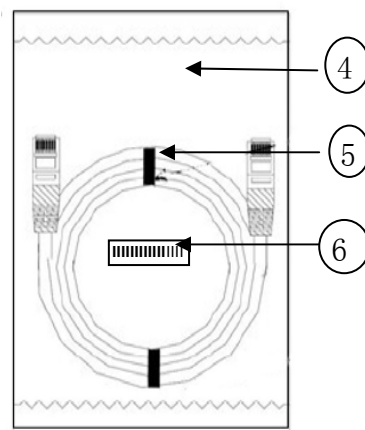


Fig 4

Wirewin[®]
European Cabling Solutions

1: Electrical test

- 1.1 100% short and open test, miss wire test
- 1.2 Insulation resistance: DV 300V 500M Ohm Min
- 1.3 TIA/EIA Channel test by Fluke tester, random test, 500Mhz ,
- 1.4 568B-568B pin out

2: All material are RoHS compliant

3: print: as per customer's request except illegal request

Part No	Name	Specification	Qty
1	Cable	S/FTP Cat6A 4pair, Cu 26AWG 7*0.145mm, PVC jacket, OD 5.9+/- 0.2	
2	Connector	8P8C RJ45 plug, 3u"gold plated Pins, shielded,yellow color plug	2
3	Boot	Wirewin boot type,	2
4	Polybag	WIREWIN bag,	1
5	cable tie	same color cable tie	2
6	Label	black print, white background	1

Wirewin [®] European Cabling Solutions			
Product	S/FTP CAT6A 26AWG CU PATCH CORD		
Part No	PKW-PIMF KAT6A	ICON	Toerance
Drawn by			x. +/- 1.00
Checked by			X.X +/- 0.50
Approved by			Scale mm
Version	A	Date	20141212