

RoHS
Compliant

Customer number

SOP

xxx

xxx

VERSION


DESCRIPTION

DATE

1.0

New Release

2015/2/4

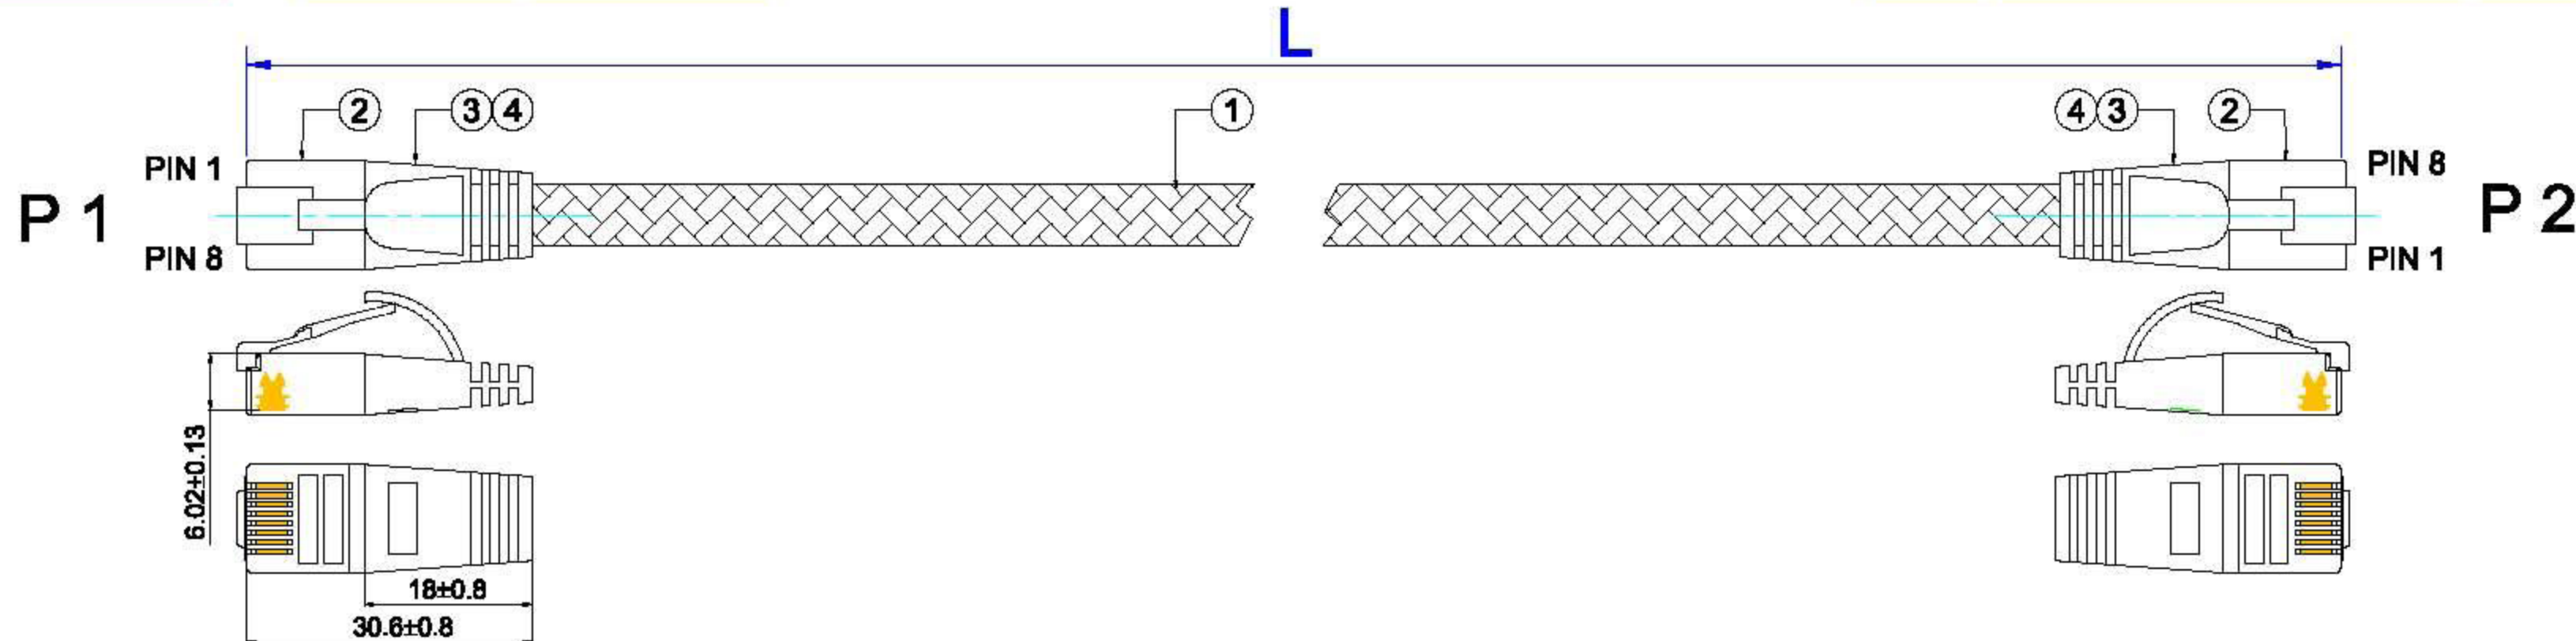

Test:

- (1)100% Open Short and miswire test.
- (2)DC300V, Contact resistance (3+2L)Ω MAX.
- (2)Insulation resistance 1MΩ MIN.
- (3)Pass TIA Cat.6 channel test(L≤15m).

PKW-NY-STP-SLIM

Wirewin[®]
European Cabling Solutions

5			TITLE	Cat6 STP 36AWG Patch Cable, xxx m			
4	PVC Grey(ULC-348/60P), Model:SR073(External mold)	UNIT	mm	P/N	DRAWN BY		
3	PVC Grey(ULC-348/60P), Model:SR041(Internal model)	unless otherwise stated Tolerances mm XXX.XX ±0.3 XX.XX ±0.2 X.XX ±0.1		Customer P/N		CHECK BY	
2	(P1&P2) RJ45,8P8C,Short plug,Long latch,Pin gold plated 50u",Nickel plated shell			SIZE	SCALE	APPROVAL BY	
1	CAT.6 STP 4P*36AWG-BC STRANDED,PVC+Nylon braid, Jacket		A4	Free	PAGE	1/1	
No.	Description						